



OPERATING MODE : NO(NORMALLY OPEN)  
 REPEATABILITY : 0.01mm  
 (OPERATING SPEED 50~200mm/min)  
 RATING : DC24V  
 (Max.10mA) STATIONARY CURRENT  
 (Max.20mA) INRUSH CURRENT  
 CONTACT MATERIAL : TUNGSTEN CARBIDE  
 CASE MATERIAL : SUS303  
 PRETRAVEL : 0.3mm  
 STROKE : 1mm  
 CONTACT FORCE : 1N

DEGREE OF PROTECTION: IEC IP40

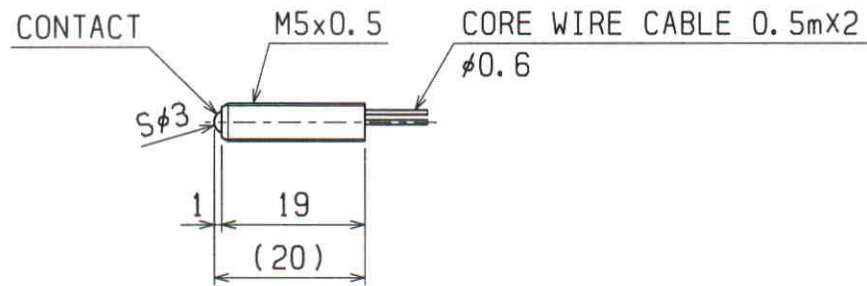

ACCESSORY  
 •HEXAGONAL NUT S629 2EA  
 M5x0.5(e:7.7/s:7/m:2.4)

⚠ PLEASE DO NOT USE EDGE SURFACE AS A STOPPER

CHK	DRA	A4	NAME	BALL PLUNGER WITH A BUILT-IN SWITCH
Kanno	15.04.27	1:1	DRAWING NUMBER	BP5MWA
	SUSAKI		METROL LTD	METROL