



OPERATING MODE : NO(NORMALLY OPEN)
 REPEATABILITY : 0.01mm
 (OPERATING SPEED 50~200mm/min)
 RATING : DC24V
 (Max. 10mA) STATIONARY CURRENT
 (Max. 20mA) INRUSH CURRENT
 CONTACT MATERIAL : TUNGSTEN CARBIDE
 CASE MATERIAL : SUS303
 PRETRAVEL : 0.3mm
 STROKE : 0.8mm
 CONTACT FORCE : 1N
 CONTACT LIFE TIME: 1 MILLION

DEGREE OF PROTECTION: IEC IP40

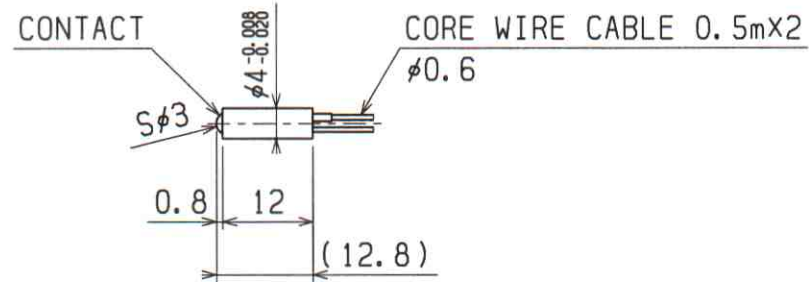

⚠ PLEASE DO NOT USE EDGE SURFACE AS A STOPPER

CHK	DRA	A 4	NAME	BALL PLUNGER WITH A BUILT-IN SWITCH
	15.04.27		DRAWING NUMBER	BP4SWA
Kanno	SUSAKI	1 : 1		METROL