OPERATING MODE : NO(NORMALLY OPEN)
REPEATABILITY : 0.005mm (AXIAL DIRECTION)
(OPERATING SPEED 50~200mm/min)
RATING : DC24V
(Max.10mA) STATIONARY CURRENT
(Max.20mA) INRUSH CURRENT
BEARING STRUCTURE: LINEAR BUSH BEARING
(DEFLECTION ANGLE POSSIBLE)
CONTACT MATERIAL : SUS HRC50~
PRETRAVEL : 0.3mm
STROKE : 2.8mm (AXIAL DIRECTION)
CONTACT FORCE : 1N (AXIAL DIRECTION)
DEGREE OF PROTECTION: IEC IP67

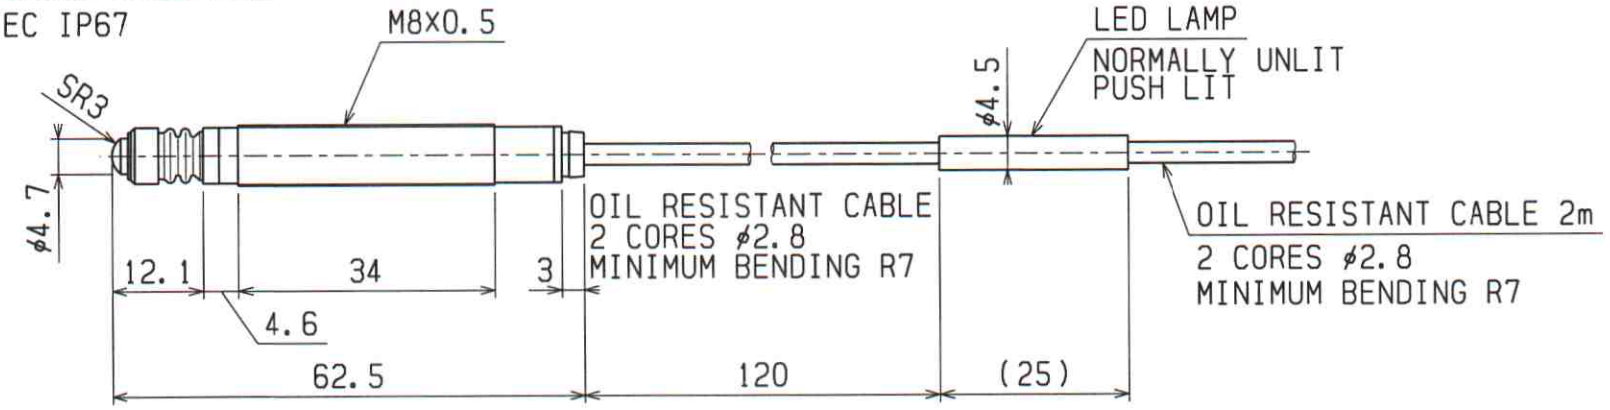

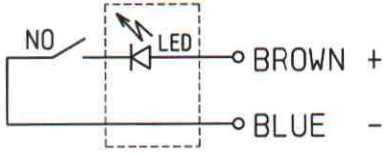

ACCESSORY
・HEXAGONAL NUT S641 2EA
M8x0.5(e:11.5/s:10/m:2)

			NAME	CS-TOUCH SWITCH
CHK	DRA	A4	DRAWING NUMBER	CSHP085A-L
Kanno	16.05.10 INOUE	1 : 1	METROL LTD.	METROL

CSHP085A-L英.CSD